




工作方式: S1
绝缘等级: B、F
防护等级: IP44、IP54
环境温度: -30℃~60℃
认证: CCC、CE、UL

Mode of operation: S1
Insulation class: B、F
Type of protection: IP44、IP54
Ambient temperature: -30℃~60℃
Certificates: CCC、CE、UL

型号	额定电压	频率	额定电流	输入功率	额定转速	最大风量	电容	噪音	净重	曲线
TYPE	VOLTAGE	FREQUENCY	CURRENT	INPUT	SPEED	AIR FLOW	CAPACITANCE	NOISE	NET WEIGHT	CURVE NO.
	V	Hz	A	W	r/min	m³/h	μF	dBA	kg	
YWF2E-200S-92/15	220	50	0.25	55	2500	780	2	52	2.0	(A)
	120	60	0.65	75	2500	895	8	52	2.0	(B)
YWF4E-200S-92/15	220	50	0.21	40	1400	415	1.5	46	2.0	(C)
	120	60	0.31	40	1700	505	5	46	2.0	(D)
YWF2D-200S-92/15	380	50	0.11	55	2300	740	/	52	2.0	(E)
YWF4D-200S-92/15	380	50	0.10	35	1400	429	/	46	2.0	(F)

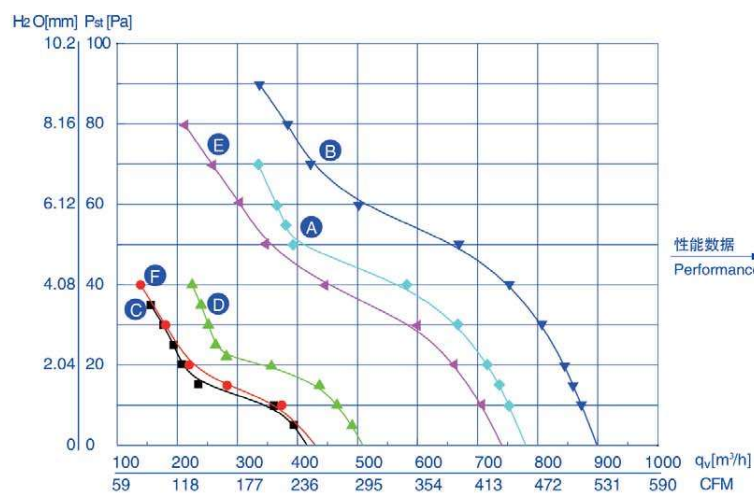

CURVE NO. 曲线	PRESSURE 静压点 Pa	SPEED 转速 r/min	INPUT 功率 W	CURRENT 电流 A	AIR FLOW 风量 m³/h
(A)	20	2615	52	0.24	715
	40	2565	53	0.24	580
(B)	20	3010	68	0.60	845
	40	2945	69	0.61	750
(C)	20	1445	42	0.20	215
	30	1435	41	0.20	175
(D)	15	1740	45	0.38	435
	30	1730	46	0.39	250
(E)	20	2455	50	0.10	660
	40	2385	52	0.10	445
(F)	20	1460	34	0.10	220
	30	1450	34	0.10	180