




工作方式: S1
绝缘等级: B、F
防护等级: IP44、IP54
环境温度: -30℃~60℃
认证: CCC、CE、UL
能效指标: 符合ErP2015
Mode of operation: S1
Insulation class: B、F
Type of protection: IP44、IP54
Ambient temperature: -30℃~60℃
Certificates: CCC、CE、UL
Target energy efficiency: ErP2015

型号	额定电压	频率	额定电流	输入功率	额定转速	最大风量	电容	噪音	净重	曲线
TYPE	VOLTAGE	FREQUENCY	CURRENT	INPUT	SPEED	AIR FLOW	CAPACITANCE	NOISE	NET WEIGHT	CURVE NO.
YWF4E-400S-102/47	220	50	0.82	180	1380	3955	6	67	6.0	Ⓐ
	120	60	2.35	250	1600	4645	22	67	6.0	Ⓑ
YWF6E-400S-102/47	220	50	0.52	108	920	3295	4	59	6.0	Ⓒ
	120	60	1.20	135	960	3720	12	59	6.0	Ⓓ
YWF4D-400S-102/47	380	50	0.47	180	1380	3920	/	67	6.0	Ⓔ
YWF6D-400S-102/47	380	50	0.35	108	920	3145	/	59	6.0	Ⓕ

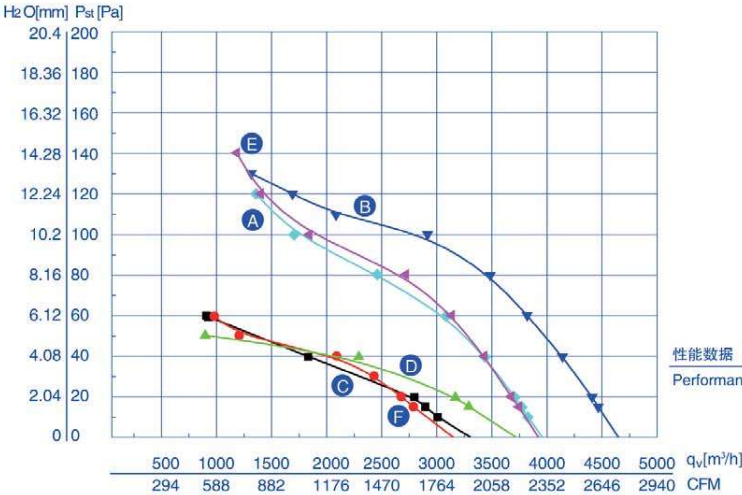

CURVE NO. 曲线	PRESSURE 静压点 Pa	SPEED 转速 r/min	INPUT 功率 W	CURRENT 电流 A	AIR FLOW 风量 m³/h
Ⓐ	20	1410	156	0.72	3700
	40	1400	167	0.77	3435
	60	1385	178	0.81	3085
Ⓑ	20	1635	221	1.89	4410
	40	1620	233	1.98	4140
	60	1595	247	2.09	3820
Ⓒ	20	900	106	0.51	2800
	40	870	117	0.55	1830
	60	840	127	0.59	925
Ⓓ	20	995	124	1.03	3165
	40	940	134	1.11	2290
Ⓔ	20	1410	160	0.44	3675
	40	1405	170	0.45	3425
	60	1390	183	0.45	3130
Ⓕ	20	930	110	0.32	2670
	40	920	120	0.32	2090
	60	905	131	0.33	980