




工作方式: S1
绝缘等级: B、F
防护等级: IP44、IP54
环境温度: -30℃~60℃
认证: CCC、CE、UL
能效指标: 符合ErP2015
Mode of operation: S1
Insulation class: B、F
Type of protection: IP44、IP54
Ambient temperature: -30℃~60℃
Certificates: CCC、CE、UL
Target energy efficiency: ErP2015

型号	额定电压	频率	额定电流	输入功率	额定转速	最大风量	电容	噪音	净重	曲线
TYPE	VOLTAGE	FREQUENCY	CURRENT	INPUT	SPEED	AIR FLOW	CAPACITANCE	NOISE	NET WEIGHT	CURVE NO.
	V	Hz	A	W	r/min	m³/h	μF	dB(A)	kg	
YWF4E-500S-137/35	220	50	1.85	380	1320	7155	10	71	9.0	(A)
YWF6E-500S-137/35	220	50	1.05	230	900	5705	10	66	9.0	(B)
YWF4D-500S-137/35	380	50	0.85	414	1300	7395	/	71	9.0	(C)
YWF6D-500S-137/35	380	50	0.55	210	900	5840	/	66	9.0	(D)

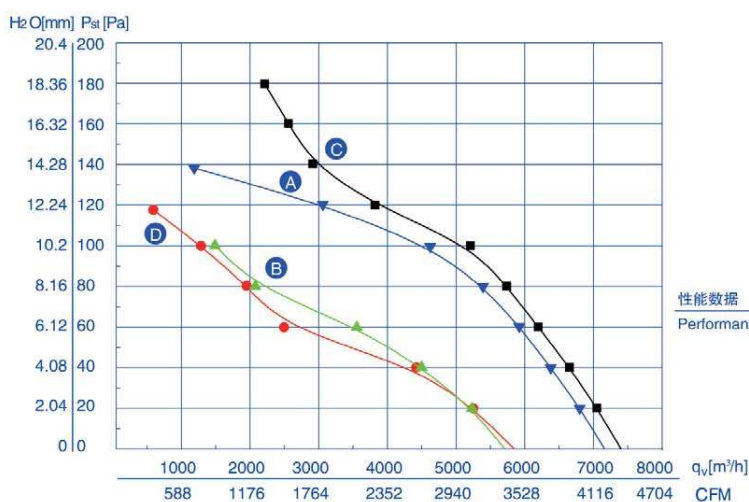

CURVE NO. 曲线	PRESSURE 静压点 Pa	SPEED 转速 r/min	INPUT 功率 W	CURRENT 电流 A	AIR FLOW 风量 m³/h
(A)	20	1370	338	1.51	6800
	60	1340	373	1.70	5915
	80	1325	397	1.80	5390
(B)	20	930	218	1.01	5230
	60	910	239	1.11	3555
	80	900	256	1.18	2075
(C)	20	1360	370	0.79	7050
	60	1335	408	0.84	6195
	80	1320	433	0.87	5735
(D)	20	915	205	0.52	5250
	60	895	231	0.55	2495
	80	870	258	0.58	1945