




工作方式: S1
绝缘等级: B、F
防护等级: IP44、IP54
环境温度: -30℃~60℃
认证: CCC、CE、UL
能效指标: 符合ErP2015
Mode of operation: S1
Insulation class: B、F
Type of protection: IP44、IP54
Ambient temperature: -30℃~60℃
Certificates: CCC、CE、UL
Target energy efficiency: ErP2015

型号	额定电压	频率	额定电流	输入功率	额定转速	最大风量	电容	噪音	净重	曲线
TYPE	VOLTAGE	FREQUENCY	CURRENT	INPUT	SPEED	AIR FLOW	CAPACITANCE	NOISE	NET WEIGHT	CURVE NO.
	V	Hz	A	W	r/min	m³/h	μF	dBA	kg	
YWF4E-550S-137/50	220	50	2.55	550	1300	8510	12	72	11	(A)
YWF6E-550S-137/50	220	50	1.45	310	900	7180	10	68	11	(B)
YWF4D-550S-137/50	380	50	1.20	600	1300	8920	/	72	11	(C)
YWF6D-550S-137/50	380	50	0.90	330	900	7555	/	68	11	(D)

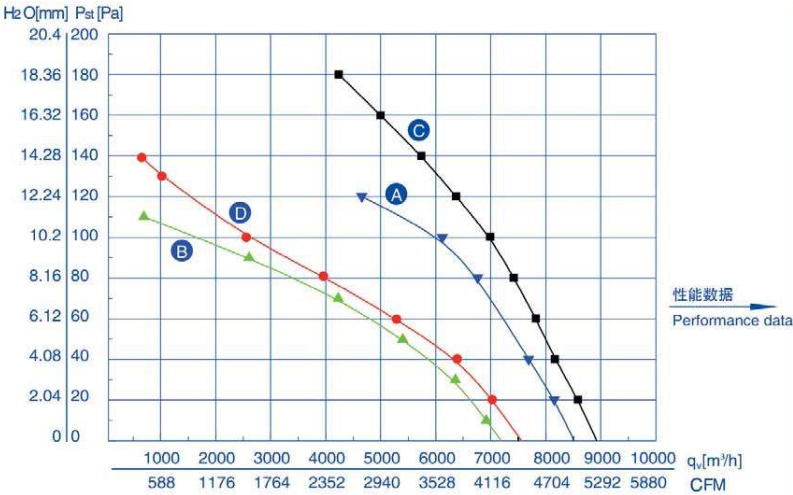

CURVE NO. 曲线	PRESSURE 静压点 Pa	SPEED 转速 r/min	INPUT 功率 W	CURRENT 电流 A	AIR FLOW 风量 m³/h
(A)	20	1355	480	2.15	8150
	80	1300	549	2.51	6760
	100	1280	565	2.58	6115
(B)	20	910	292	1.35	6635
	50	900	306	1.47	5400
	90	850	370	1.75	2605
(C)	20	1380	515	1.10	8585
	80	1350	591	1.20	7415
	120	1335	635	1.25	6370
(D)	20	900	316	0.81	7025
	60	890	347	0.85	5290
	100	865	404	0.92	2555