




工作方式: S1
绝缘等级: B、F
防护等级: IP44、IP54
环境温度: -30℃~60℃
认证: CCC、CE、UL
能效指标: 符合ErP2015
Mode of operation: S1
Insulation class: B、F
Type of protection: IP44、IP54
Ambient temperature: -30℃~60℃
Certificates: CCC、CE、UL
Target energy efficiency: ErP2015

型号	额定电压	频率	额定电流	输入功率	额定转速	最大风量	电容	噪音	净重	曲线
TYPE	VOLTAGE	FREQUENCY	CURRENT	INPUT	SPEED	AIR FLOW	CAPACITANCE	NOISE	NET WEIGHT	CURVE NO.
	V	Hz	A	W	r/min	m³/h	μ F	dBA	kg	
YWF4E-630S-137/70	220	50	3.50	750	1360	11435	16	75	15	(A)
YWF6E-630S-137/70	220	50	2.55	520	900	10515	12	71	15	(B)
YWF4D-630S-137/70	380	50	1.60	800	1320	12420	/	75	15	(C)
YWF6D-630S-137/70	380	50	1.45	550	900	11785	/	71	15	(D)

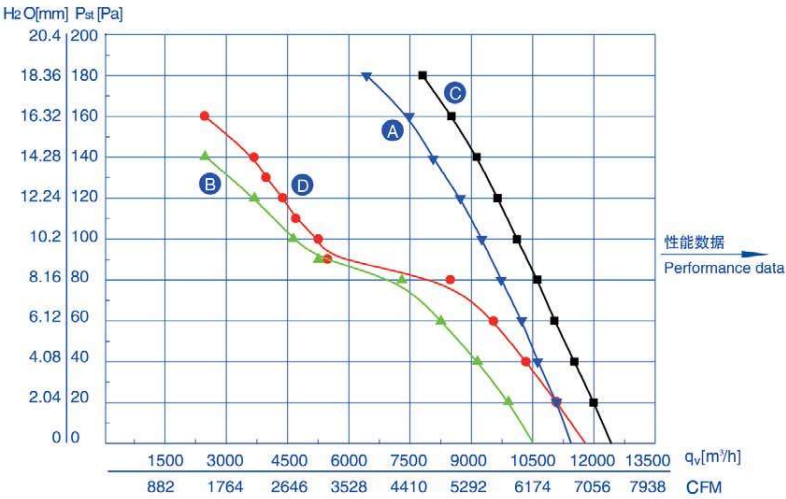

CURVE NO. 曲线	PRESSURE 静压点 Pa	SPEED 转速 r/min	INPUT 功率 W	CURRENT 电流 A	AIR FLOW 风量 m³/h
(A)	20	1390	718	3.33	11080
	80	1365	807	3.80	9725
	160	1320	944	4.46	7480
(B)	20	925	508	2.80	9910
	80	895	582	3.09	7295
	120	860	674	3.45	3690
(C)	20	1370	768	1.56	12000
	80	1340	870	1.71	10615
	160	1315	982	1.85	8510
(D)	20	920	574	1.57	11080
	80	900	649	1.63	8485
	120	880	724	1.68	4380