




工作方式: S1
绝缘等级: B、F
防护等级: IP44、IP54
环境温度: -30℃~60℃
认证: CCC、CE
能效指标: 符合ErP2015
Mode of operation: S1
Insulation class: B、F
Type of protection: IP44、IP54
Ambient temperature: -30℃~60℃
Certificates: CCC、CE
Target energy efficiency: ErP2015

型号	额定电压	频率	额定电流	输入功率	额定转速	最大风量	电容	噪音	净重	曲线
TYPE	VOLTAGE	FREQUENCY	CURRENT	INPUT	SPEED	AIR FLOW	CAPACITANCE	NOISE	NET WEIGHT	CURVE NO.
	V	Hz	A	W	r/min	m³/h	μF	dB(A)	kg	
YWF6D-800S-180/75	△380	50	2.85	1200	920	20695	/	75	35	Ⓐ
	Y 380	50	1.65	930	770	17635	/	74	35	Ⓑ

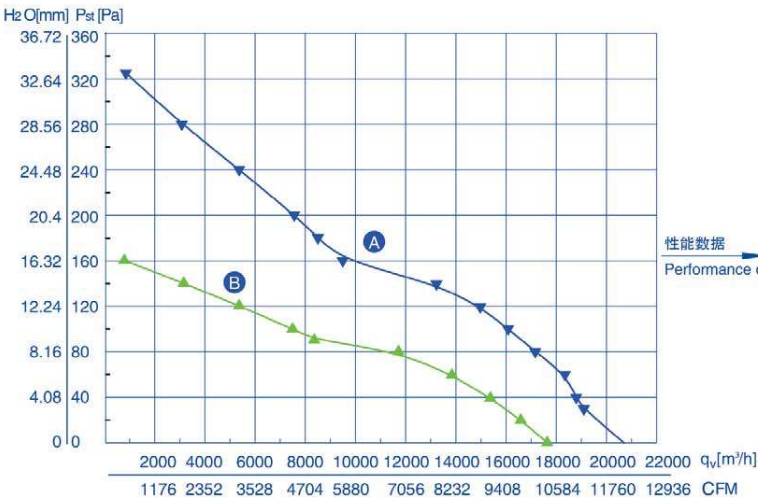

CURVE NO. 曲线	PRESSURE 静压点 Pa	SPEED 转速 r/min	INPUT 功率 W	CURRENT 电流 A	AIR FLOW 风量 m³/h
Ⓐ	20	930	1255	3.06	19860
	60	915	1389	3.16	18350
	120	905	1519	3.30	14970
	180	890	1663	3.46	8505
Ⓑ	20	780	975	1.85	16590
	60	735	1057	1.90	13845
	80	710	1109	2.00	11710
	100	705	1126	2.03	7495