


NEU6217U



ENGINEERING CODE
863JA51



REFRIGERANT
R-290



POWER SUPPLY
220-240 V 50 Hz



APPLICATION
MBP



MOTOR TYPE
CSIR



STANDARD
EN12900



COOLING CAPACITY
988 W



EFFICIENCY
1.71 W/W

DATA

GENERAL DATA

Model	NEU6217U
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	MBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/220
HP	3/4
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	11.03 Ω at 25°C
Run Winding Resistance	5.15 Ω at 25°C
Locked Rotor Amperage (LRA) 50Hz	21 A
Rated Load Amperage (LMBP) at 50 Hz	3.8 A

MECHANICAL DATA

Displacement	14.28 cm ³
Oil Charge	350 ml
Oil Type	ESTER
Oil Viscosity	ISO22
Weight	11.6 Kg

ELECTRICAL COMPONENTS

Start Capacitor	88-108 µf/330 V
CSR CSIR BOX	No
Starting Device Type	RELAY
Overload Protection	MST20APK-3259

EXTERNAL CHARACTERISTICS

Base Plate	SMALL
------------	-------

Connector	Internal Diameter	Shape	Material
Suction	8.1 mm	SLANTED 42°	COPPER
Discharge	6.1 mm	STRAIGHT	COPPER
Process	6.1 mm	SLANTED 42°	COPPER

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-290
Tested Application	MBP
Tested Standard	EN12900
Tested Cooling	Fan
Tested Voltage	220 V
Tested Frequency	50 Hz
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
45	-10	988	1.71	578	3.15	12.37
Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.						

PERFORMANCE CURVE

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-15	969	2.06	470	2.88	10.80
-10	1146	2.19	524	2.87	13.00
-5	1437	2.67	538	3.14	16.19
0	1721	3.09	557	3.28	19.53
Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.					

PERFORMANCE CURVE

Condensing Temperature 45°C


Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-15	840	1.64	513	3.12	10.28
-10	988	1.71	578	3.15	12.37
-5	1246	2.04	610	3.45	15.44
0	1494	2.28	655	3.61	18.67
Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.					

PERFORMANCE CURVE

Condensing Temperature 55°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-10	831	1.31	633	3.39	11.68
-5	1055	1.56	675	3.77	14.61
0	1266	1.72	737	4.01	17.69
Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.					

ENVELOPE

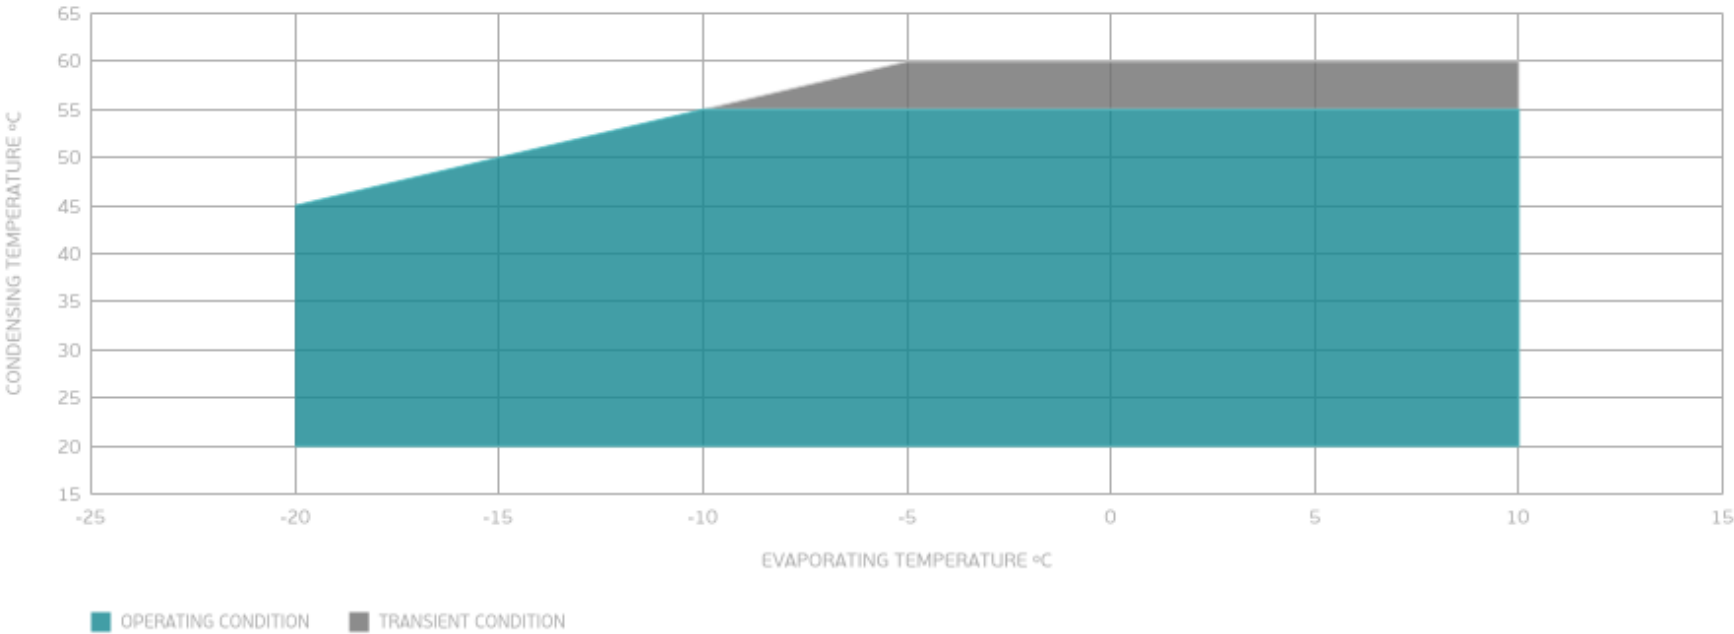

EXTERNAL DIMENSIONS

