


SILENZIATORI / MUFFLERS

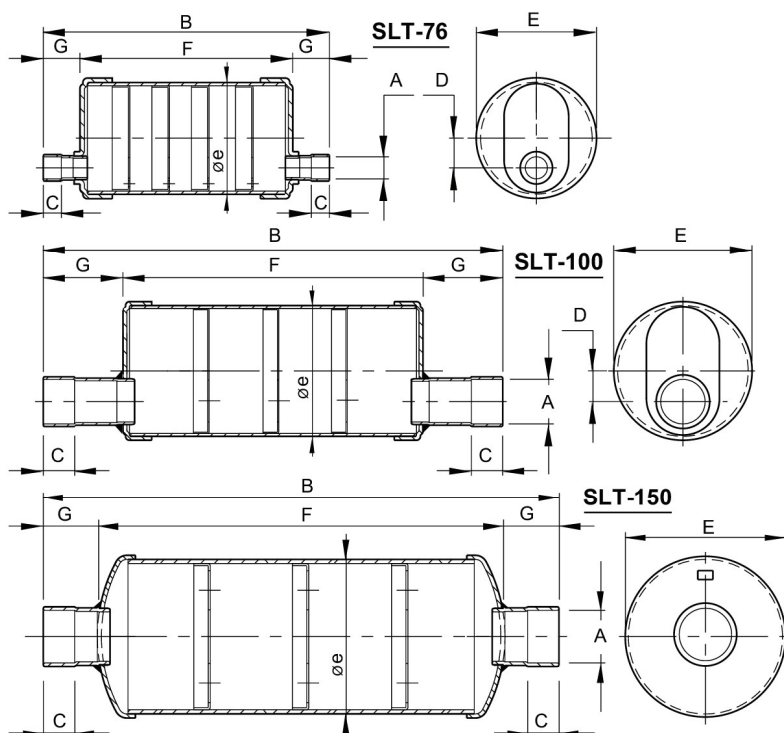

Art. 4 § 3

MEC s.p.a. LEGNAGO VERONA-Italy I-37045		Art.4 Par.3	
Type:			
Manufacture- Nr.			
Manufacture year			
Fluids Group		Excluded	
Category		Volume V.L.	
Temperature	TS- C		
Max.Permissible pressure	PS-bar		
Test pressure	PT-bar		

ETICHETTE / LABELS

CAT. I

MEC s.p.a. LEGNAGO VERONA-Italy I-37045		CE	
Type:			
Manufacture- Nr.			
Manufacture year			
Fluids Group		Excluded	
Category		Volume V.L.	
Temperature	TS- C		
Max.Permissible pressure	PS-bar		
Test pressure	PT-bar		

CAT. II

MEC s.p.a. LEGNAGO VERONA-Italy I-37045		CE 0036	
Type:			
Manufacture- Nr.			
Manufacture year			
Fluids Group		Excluded	
Category		Volume V.L.	
Temperature	TS- C		
Max.Permissible pressure	PS-bar		
Test pressure	PT-bar		

CALCULATION ACC.TO FLUID GROUP 2

DATI TECNICI, TECHNICAL DATA

Temperatura TS - C Temperature TS - C	Min. -10 Max. +140	Min. -50 Max. +140	Pressione di collaudo PT Test pressure PT
Pressione max. consentita PS-bar Max permissible pressure PS-bar	31	23	PT-bar: 44.33 (31x1.43)
	33	24	PT-bar: 47.19 (33x1.43)
	45	33	PT-bar: 58.50 (45x1.30)

Refrigerants: HCFC-HFC-HFO-HC ,CO₂ and other ones with low GWP

TIPO TYPE	MODELLO MODEL	A ODS mm	A ODS inch	B	C	D	E	Øe	F	G	PESO WEIGHT	VOLUME	CAT. PED PS=31 bar	CAT. PED PS=33 bar	CAT. PED PS=45 bar
SLT-76	SLT-76/10	10	/	193	10	20	82	76	145	24	1,1	0,53	Art. 4§3	Art. 4§3	
	SLT-76/12	12	/	193	12	20	82	76	145	24	1,1	0,53			
	SLT-76/(13)-1/2"	/	1/2"	193	12	20	82	76	145	24	1,1	0,53			
	SLT-76/16-5/8"	16	5/8"	195	13	20	82	76	145	25.5	1,1	0,53			
	SLT-76/18	18	/	197	15	20	82	76	145	26.5	1,1	0,53			
	SLT-76/3/4"	/	3/4"	197	15	20	82	76	145	26.5	1,1	0,53			
	SLT-76/22	22	/	248	25	12	82	76	175	36.5	1,3	0,65			
	SLT-76/7/8"	/	7/8"	248	25	12	82	76	175	36.5	1,3	0,65			
SLT-100	SLT-76/28	28	/	248	25	12	82	76	175	36.5	1,3	0,65	CAT. I	CAT. I	CAT. II
	SLT-76/1-1/8"	/	1-1/8"	248	25	12	82	76	175	36.5	1,3	0,65			
	SLT-100/35 1-3/8"	35	1-3/8"	350	25	23	106	100	230	60	2,4	1,60			
SLT-150	SLT-100/42	42	/	460	25	18	106	100	330	65	3,15	2,30	CAT. I	CAT. I	CAT. II
	SLT-100/1-5/8"	/	1-5/8"	460	25	18	106	100	330	65	3,15	2,30			
	SLT-150/54-2-1/8"	54	2-1/8"	520	30	/	160	150	410	55	7,6	6,40			
	SLT-150/64	64	/	520	30	/	160	150	410	55	7,8	6,40			
	SLT-150/67-2-5/8"	67	2-5/8"	520	28	/	160	150	410	55	8,0	6,40			
SLT-150	SLT-150/80	80	/	520	33	/	160	150	410	55	8,0	6,40			
	SLT-150/3-1/8"	/	3-1/8"	520	33	/	160	150	410	55	8,0	6,40			

SILENZIATORI CONSIGLIATI IN FUNZIONE DEI COMPRESSORI / SUGGESTED MUFFLERS ACCORDING TO THE COMPRESSOR

MODELLO / MODEL	COMPRESSORE HP NOMINALI COMPRESSOR NAMEPLATE HP	RESA FRIGORIFERA (KW) REFRIGERANT CAPACITY (KW)	TUBO DI MANDATA / INLET PIPE		
			Ø (mm)	Ø (inch)	VEL. (m/s)
SLT-76/10	3-5	~9,5/~14,5	10	/	13-18,5
SLT-76/12	3-5	~9,5/~14,5	12	/	13-18,5
SLT-76/(13)-1/2"	3-5	~9,5/~14,5	/	1/2"	13-18,5
SLT-76/16-5/8"	7,5-10	~14,5/~32,5	16	5/8"	13-18,5
SLT-76/18	10-12	~22/~38	18	/	13-19
SLT-76/3/4"	10-12	~22/~38	/	3/4"	13-19
SLT-76/22	12-20	~36/~55	22	/	12-19
SLT-76/7/8"	12-20	~36/~55	/	7/8"	12-19
SLT-76/28	25-35	~56/~86	28	/	12-19
SLT-76/1-1/8"	25-35	~56/~86	/	1-1/8"	12-19
SLT-100/35 1-3/8"	35-50	~86/~120	35	1-3/8"	12-19
SLT-100/42	50-60	~120/~160	42	/	12-19
SLT-100/1-5/8"	50-60	~120/~160	/	1-5/8"	12-19

La ditta allo scopo di migliorare la propria produzione si riserva il diritto di apportare modifiche senza preavviso.

The Company to improve production reserves the right of modifying without notice.