


INDICATORI DI LIQUIDO & UMIDITÀ
serie MI PLUS


LIQUID AND MOISTURE INDICATORS
MI PLUS series

Type	Type of con- nection		SAE Flare	ODS Ø		ODM Ø		For pipe Ø		TS [°C]	PS [bar]	Dimensions [mm]					Category 2014/68/EU PED	Weight [g]	Pieces per box
				[in]	[mm]	[in]	[mm]	[in]	[mm]			ØD	L	H	H1	CH			
MI2MM PLUS	Male-male		1/4"	-	-	-	-	-	-	- 40÷+120	50	32	70	22,5	8	14	Art. 4.3	120	25
MI3MM PLUS			3/8"	-	-	-	-	-	-				75	29,5	12	22		190	25
MI4MM PLUS			1/2"	-	-	-	-	-	-				80					204	25
MI5MM PLUS			5/8"	-	-	-	-	-	-				88	31,5	13	24		255	25
MI6MM PLUS			3/4"	-	-	-	-	-	-				91	35,5	15	28		325	25
MI2MF PLUS	Male-female		1/4"	-	-	-	-	-	-				70	29,5	12	22		209	25
MI3MF PLUS			3/8"	-	-	-	-	-	-				75					202	25
MI4MF PLUS			1/2"	-	-	-	-	-	-				80	31,5	13	24		235	25
MI5MF PLUS			5/8"	-	-	-	-	-	-				85	35,5	15	28		305	25
MI6MF PLUS			3/4"	-	-	-	-	-	-				94	41,5	17,5	35		471	25
MI2SL PLUS			-	-	-	1/4"	6	-	-				202	7	22,5	-		130	35
MI2SLP PLUS			-	-	-	1/4"	6	-	-				98,5	38	58,5			130	32
MI2S PLUS	Soldering	Hot forged brass	-	1/4"	-	-	-	-	-				125	22,5	8			126	50
MI3S PLUS			-	3/8"	-	-	-	-	-								132	50	
MIM10S PLUS			-	-	10	-	-	-	-								133	50	
MIM12S PLUS			-	-	12	-	-	-	-				132	29,5	12		203	50	
MI4S PLUS			-	1/2"	-	-	-	-	-								205	50	
MI5S PLUS			-	5/8"	16	-	-	-	-				145				198	50	
MIM18S PLUS			-	-	18	-	-	-	-				145	31,5	13		235	50	
MI6S PLUS			-	3/4"	-	-	-	-	-				145	31,5	13		237	50	
MI7S PLUS			-	7/8"	22	-	-	-	-				155	35,5	15		309	42	
MI9S PLUS			-	1.1/8"	28	-	-	-	-				183	41,5	17,5		510	42	
MIM28SCU PLUS			Tube	-	-	-	-	28	-				-	150	30		-	228	26
MI5T PLUS	Saddle		-	-	-	-	-	5/8"	16			36	-	36	-	35	Excluded	120	25
MIM18T PLUS			-	-	-	-	-	-	18				-	37	-			120	25
MI7T PLUS			-	-	-	-	-	7/8"	22				-	39	-			120	25
MI9T PLUS			-	-	-	-	-	1.1/8"	28				-	42	-			120	25
MI11T PLUS			-	-	-	-	-	1.3/8"	35				-	45	-			120	25
MIM42T PLUS			-	-	-	-	-	1.5/8"	42				-	48,5	-			120	25
MI17T PLUS			-	-	-	-	-	2.1/8"	54				-	56	-			120	25


MI..T PLUS




MI..S PLUS

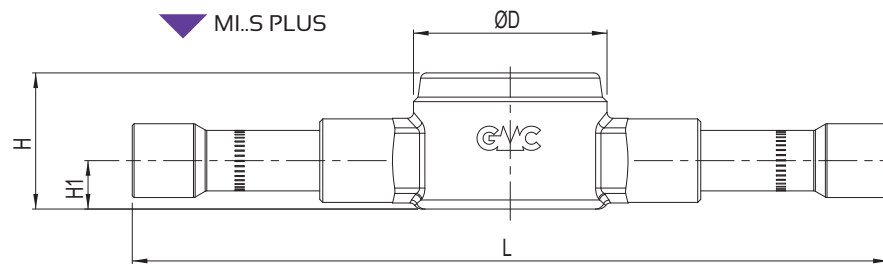


MI..SL PLUS

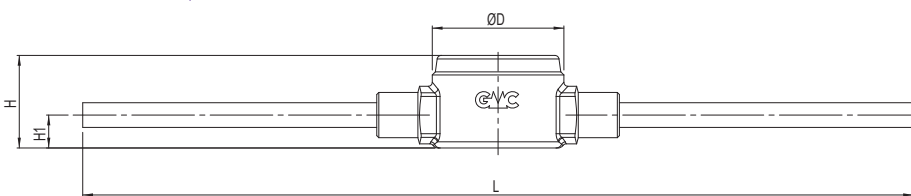


MI..MM PLUS

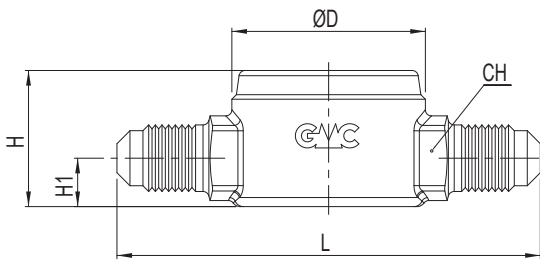

MI..MF PLUS

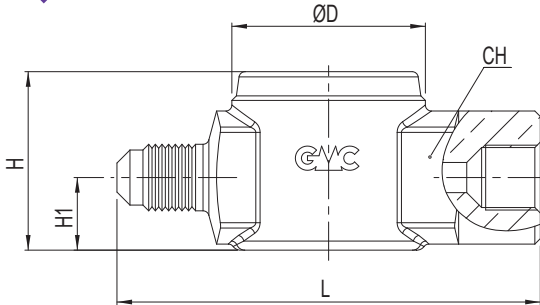

MI..S PLUS
MI..SCU PLUS

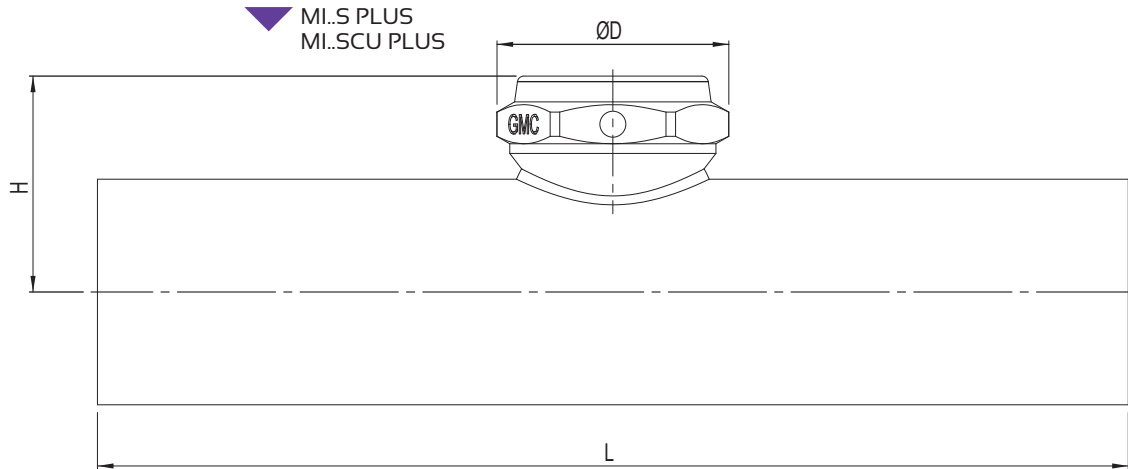

MI..SLP PLUS

